











# LEPCOS (North-West Laboratory)

http://ferrite.ru Tel/fax +7-812-369-11-54

St-Petesburg, Russia

## REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
②		Y.G.HSU	S.M.SHIH	01/27/07
③		X.H.GU	G.F.YANG	11/28/07
④		S.Y.TANG	G.F.YANG	12/04/07

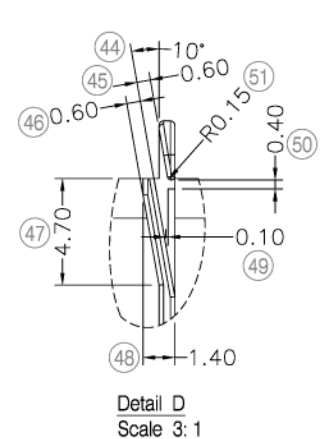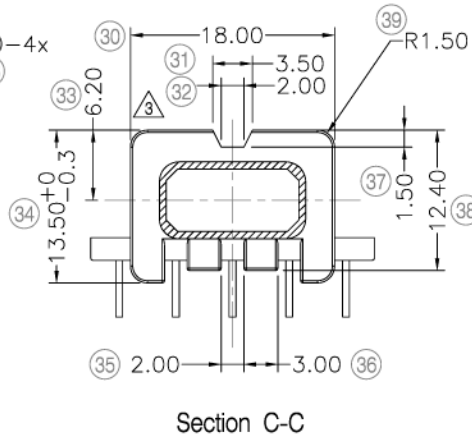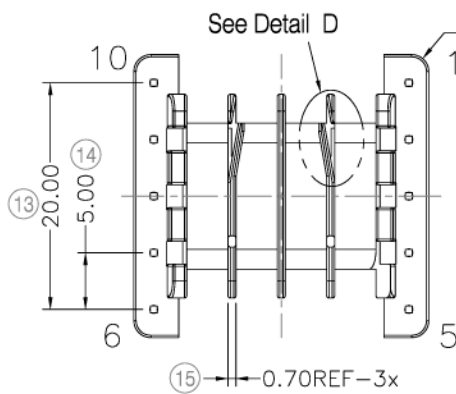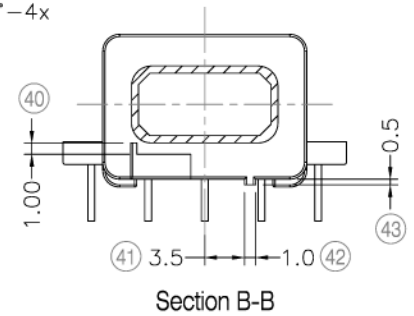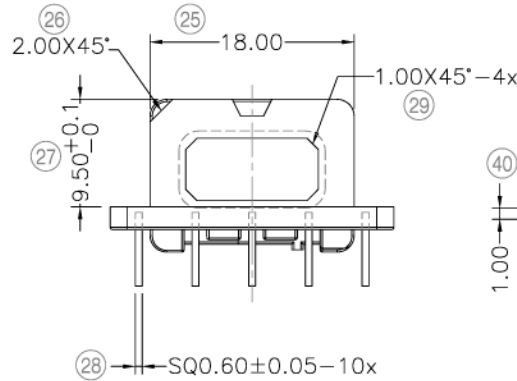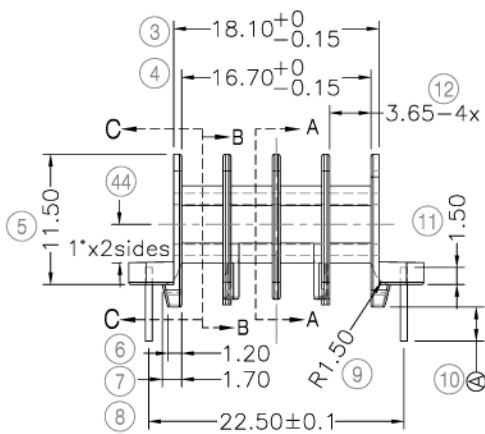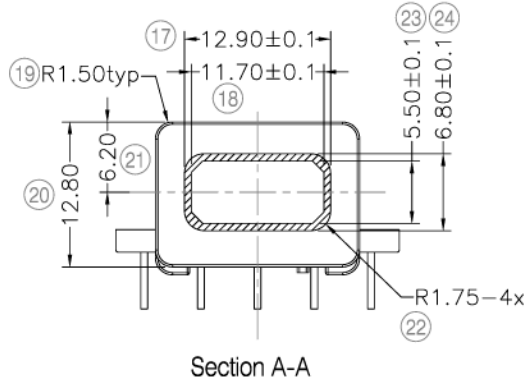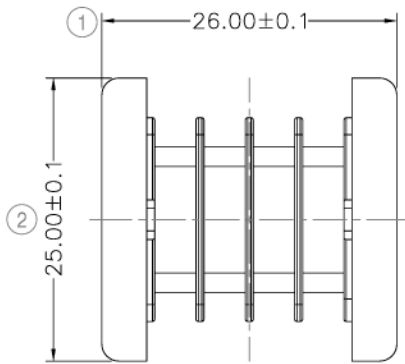

DWG NO. EFD25-10P-TH-5.0-E-1-4S

PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-207-02054.106	PM-9630	C.P WIRE	Sn	ALL PIN (A) = 3.2±0.2	



TOLERANCE: 0~6:±0.1 6~30:±0.20

UNIT : m / m

SCALE 1.5 : 1

Finish: 1. Pb wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.  
 2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.  
 3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 4