


HOLE PATTERN:

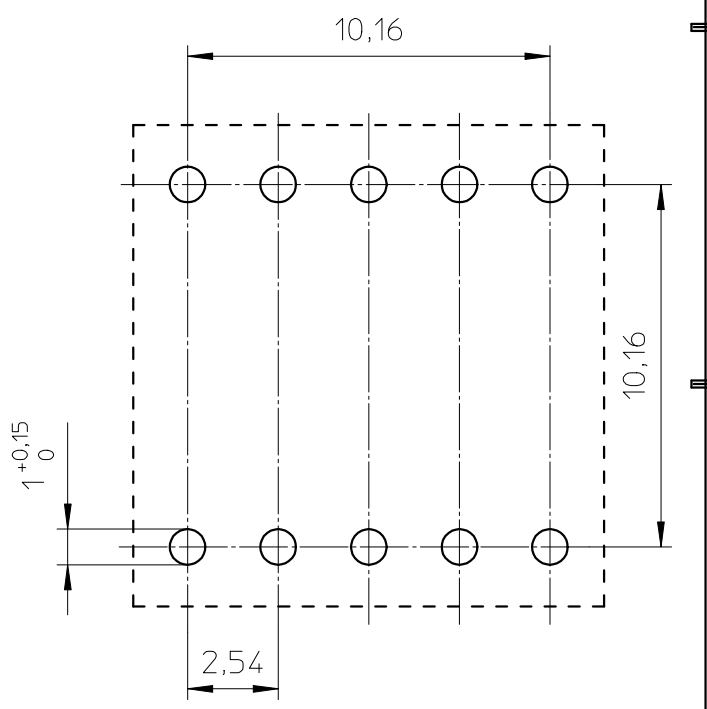

Coil former material: Sumikon PM9820 (PF), glass-reinforced.  
 UL file number: E41429 - UL94V-0.  
 Pin material: Copper-clad steel, Sn plated.  
 Max. operating temp.: acc. to IEC 60 085 class H, 180°C.  
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Test Ta, method 1B, 350°C-3,5s  
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s  
 Min. winding area: 13,5 mm<sup>2</sup>.  
 Mean length of turn: 23 mm.

CLASS.NO.		CSH-EP13-1S-10P	4322 021 35031		95-12-07		
96-11-25					96-11-25		
M.Veekens					99-10-06		
MPA					04-06-29		
NAME NAAM	M.Veekens	SUPERS. VERV.	1	SH BL.	112 - 001 010	2004-09-28	A4
CHECK CONTR.	DAT.	88-04-22	Property of Eigendom van		© FERROXCUBE 2000		