
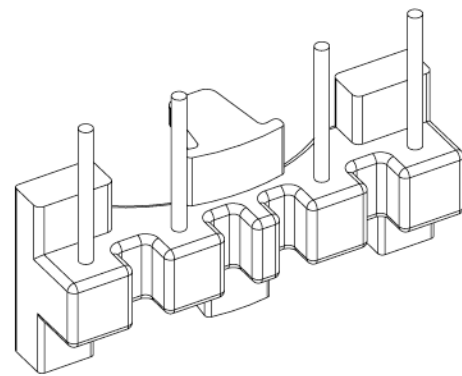
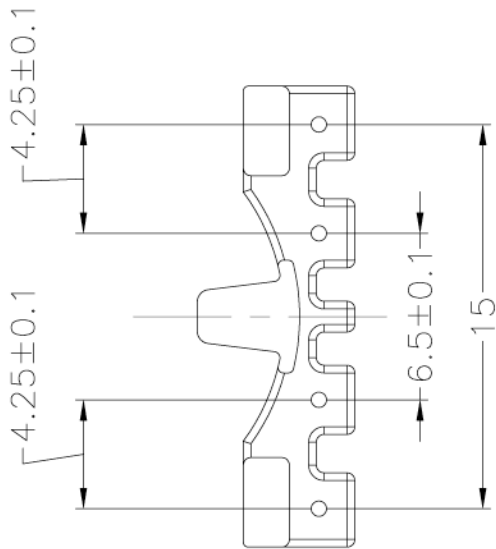
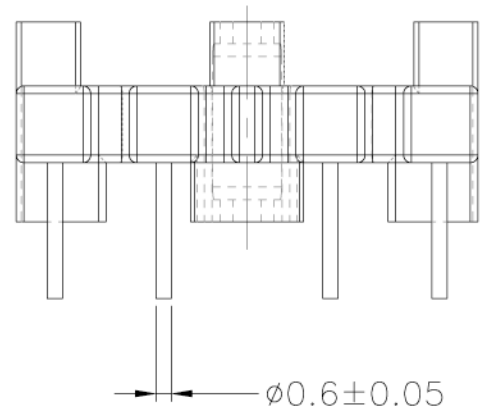
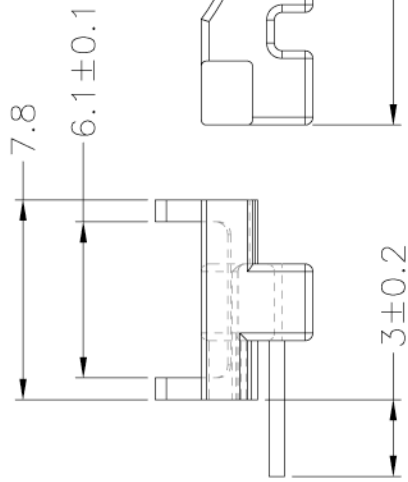
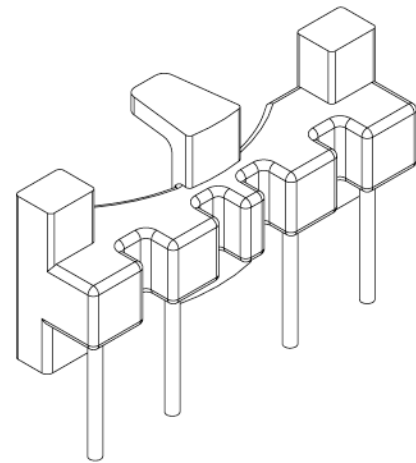


LEPCOS (North-West Laboratory)
<http://ferrite.ru> Tel/fax +7-812-369-11-54

REVISIONS				
REV	SYM	DRAFTER	CHECKER	DATE
△1		G.F.YANG	W.H.HSU	12/16/09
△2		H.X.DUAN	W.H.HSU	07/16/10
△3				

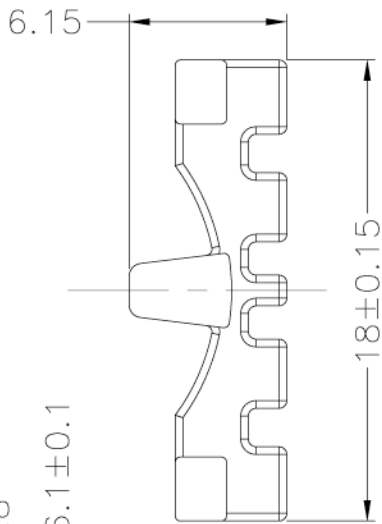

DWG NO. OR14X9-5-4P-BASE-G-12

PART NO.

MATERIAL (BOBBIN)

MATERIAL (TERMINAL)

TERMINAL (PLATING)

PIN ALLOCATION

NOTE

TBI-220-16071.1206

PM-9820(BK)


CP WIRE

Sn

ALL PIN

S

H



TOLERANCE: $0 < L \leq 4: \pm 0.1$ $4 < L \leq 16: \pm 0.2$ $16 < L \leq 63: \pm 0.3$

UNIT : m / m

SCALE 1 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μ m (200 μ inches) min,Base nickel 0.625 μ m (25 μ inches) min.
 2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μ m (200 μ inches) min.
 3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV

2