
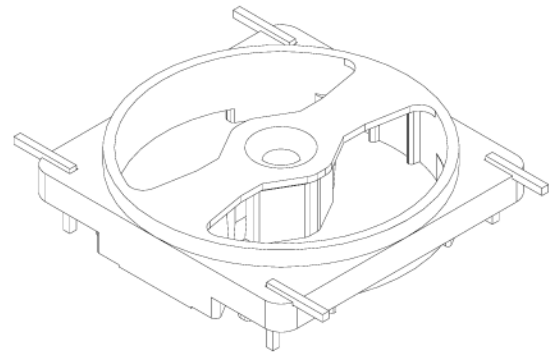
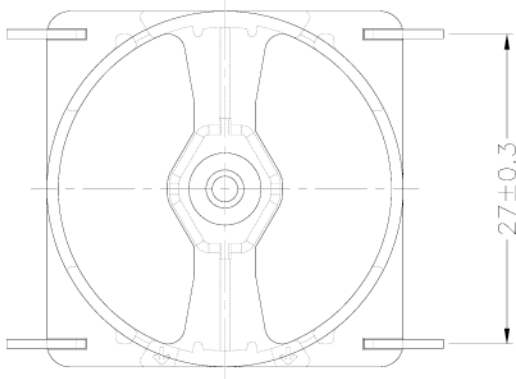

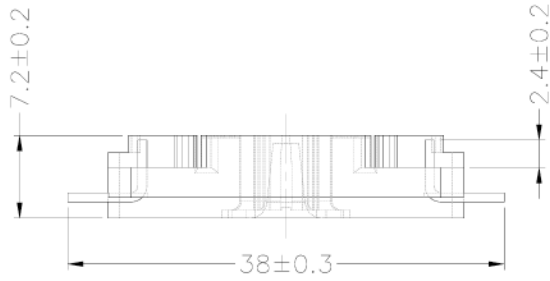
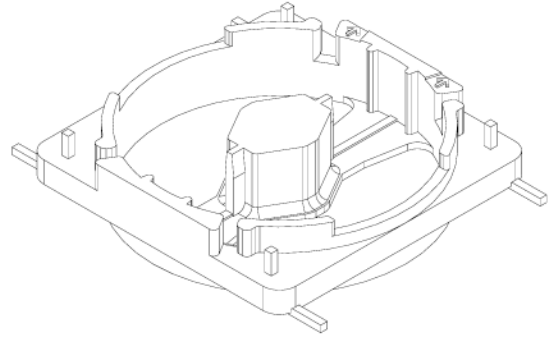


# LEPCOS (North-West Laboratory)

http://ferrite.ru Tel/fax +7-812-369-11-54

## REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
1		G.F.YANG	W.H.HSU	02/26/10
2				
3				

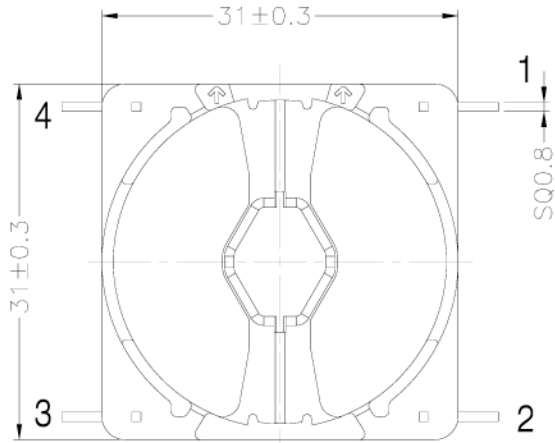

DWG NO. OR25X4-15-BASE-J-12

PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-220-16091.1206	PM-9820	CP WIRE	Sn	ALL PIN A	



TOLERANCE: 0 < L ≤ 4: ± 0.1 4 < L ≤ 16: ± 0.2 16 < L ≤ 63: ± 0.3

UNIT : m / m

SCALE 1 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness: Sn plating, 100,5 μm (200 μ inches) min, Base nickel 0.625 μm (25 μ inches) min.  
 2. CP wire Immersion Sn on terminal : Thickness: Sn plating, 100,5 μm (200 μ inches) min.  
 3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 1