






SLF10165T-1R5N6R83PF

Applications		Commercial Grade
Feature		Wire Wound
		Magnetic Shield
		Ferrite Core
Series	SLF Series / SLF10165 Type	
Status	PROD	



Size	
Length(L)	10.10mm +/-0.30mm
Width(W)	10.10mm +/-0.30mm
Thickness(T)	6.50mm +/-0.30mm
Recommended Land Pattern (A)	2.50mm Nom.
Recommended Land Pattern (B)	5.60mm Nom.
Recommended Land Pattern (C)	3.20mm Nom.

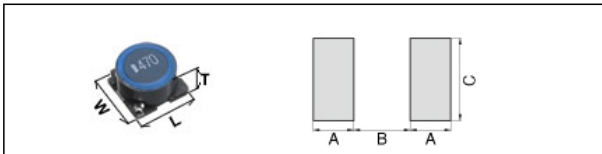
Electrical Characteristics	
Inductance	1.5uH +/-30% at 100kHz
Rated Current (L Change) [Max.]	10.7A (10% Down)
Rated Current (Temperature Rise) [Max.]	
DC Resistance [Nom.]	6.7mΩ
DC Resistance [Max.]	8.71mΩ

Other	
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105degC
Soldering Method	Reflow, Iron Soldering
AEC Q200	No
Packing	Blister (Plastic)Taping [330mm Reel]
Package Quantity	500 Pcs Min.
Weight	1.9g


•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.

SLF10165T-1R5N6R83PF


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

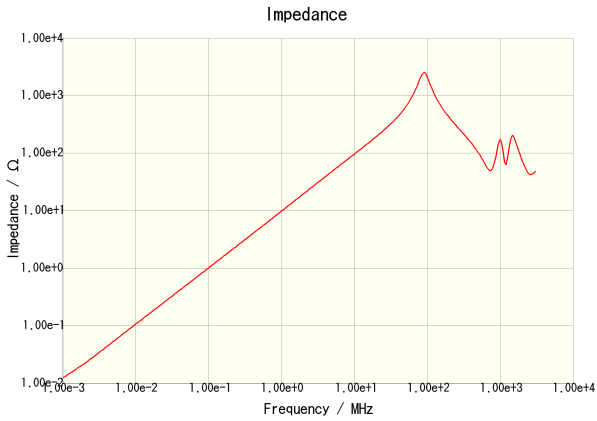


SLF10165T-1R5N6R83PF

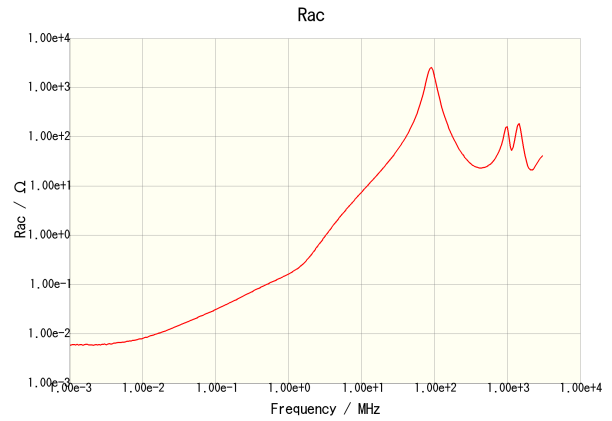

SLF10165T-1R5N6R83PF

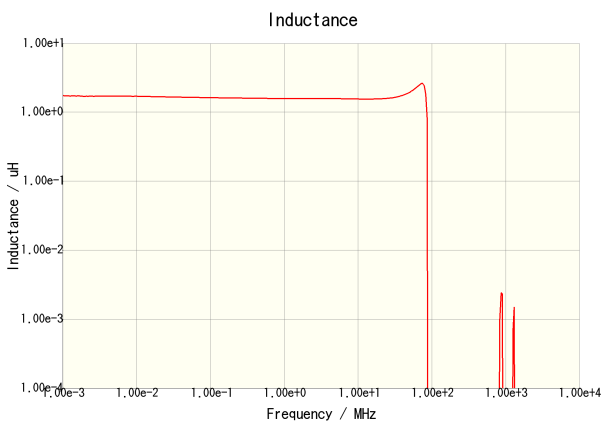

SLF10165T-1R5N6R83PF

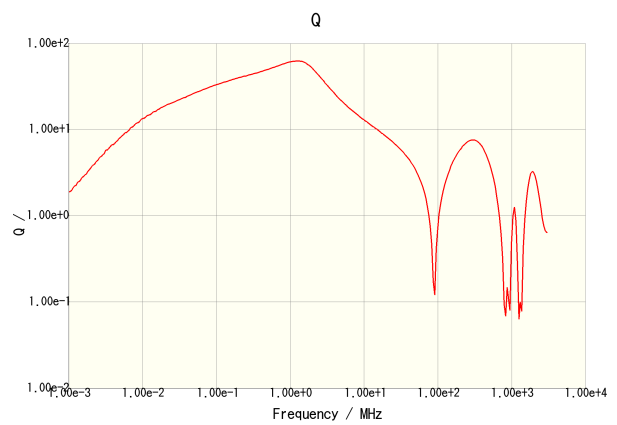


SLF10165T-1R5N6R83PF


•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.

SLF10165T-1R5N6R83PF


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

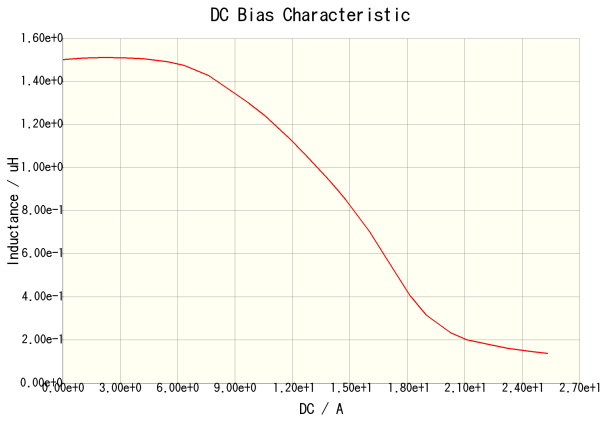

SLF10165T-1R5N6R83PF(Amb. Temp. = 20degc)

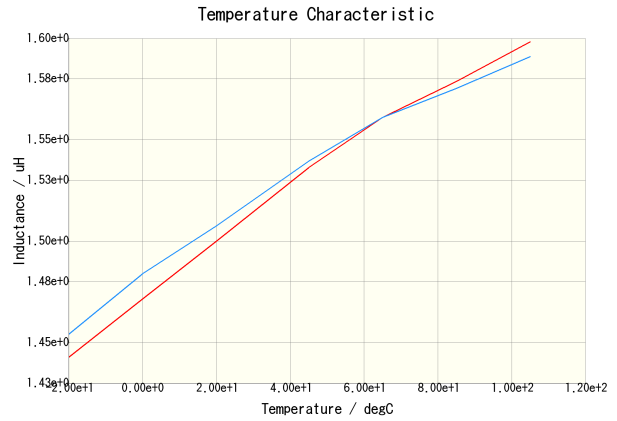

SLF10165T-1R5N6R83PF(DC = 0A) SLF10165T-1R5N6R83PF(DC = 3.4A)

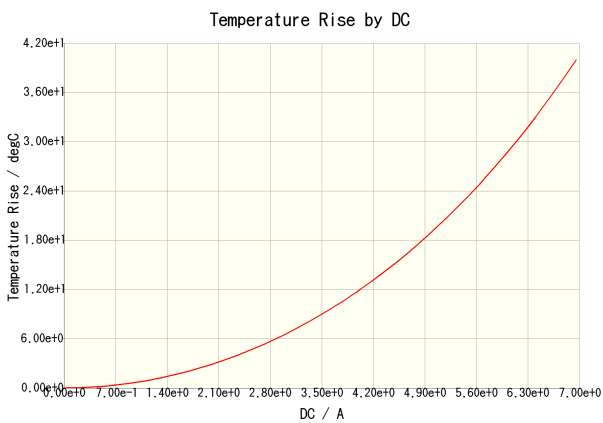

SLF10165T-1R5N6R83PF(Amb. Temp. = 20degc)

•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.