






# CLF10040T-4R7N

Applications		Commercial Grade
Feature		Wire Wound
		Magnetic Shield
		Ferrite Core
Series	CLF Series / CLF10040 Type	
Status	PROD	



Size	
Length(L)	10.00mm +/-0.30mm
Width(W)	9.70mm +/-0.30mm
Thickness(T)	3.80mm +/-0.30mm
Recommended Land Pattern (A)	2.50mm Nom.
Recommended Land Pattern (B)	5.60mm Nom.
Recommended Land Pattern (C)	3.20mm Nom.

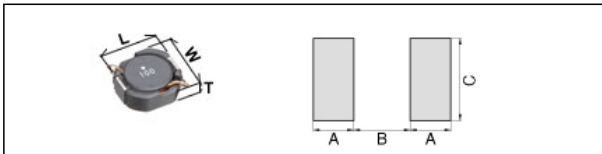
Electrical Characteristics	
Inductance	4.7uH +/-30% at 100kHz
Rated Current (L Change) [Typ.]	5.4A (10% Down)
Rated Current (Temperature Rise) [Typ.]	4.2A (30degC Rise)
DC Resistance [Nom.]	14.5mΩ
DC Resistance [Max.]	18.85mΩ

Other	
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105degC
Soldering Method	Reflow, Iron Soldering
AEC Q200	No
Packing	Blister (Plastic)Taping [330mm Reel]
Package Quantity	800Pcs Min.
Weight	1.3g


•This PDF document was created based on the data listed on the TDK Corporation website.  
 •All specifications are subject to change without notice.

# CLF10040T-4R7N


**Characteristic Graphs** (This is reference data, and does not guarantee the product's characteristics.)

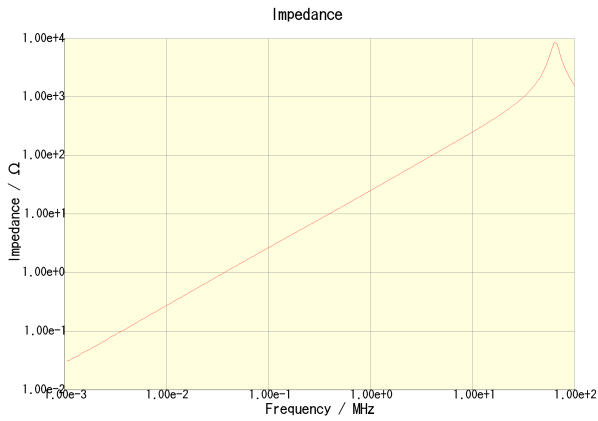


CLF10040T-4R7N

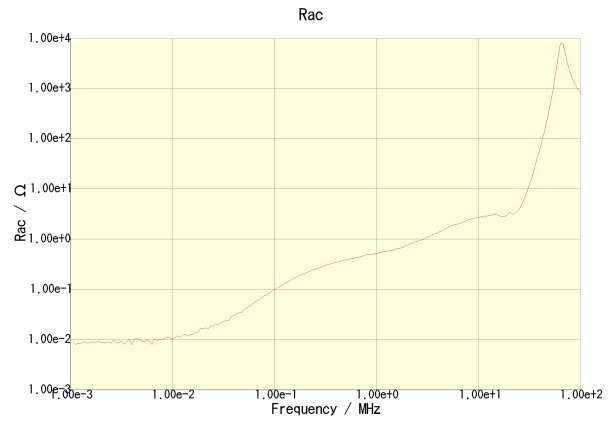

CLF10040T-4R7N

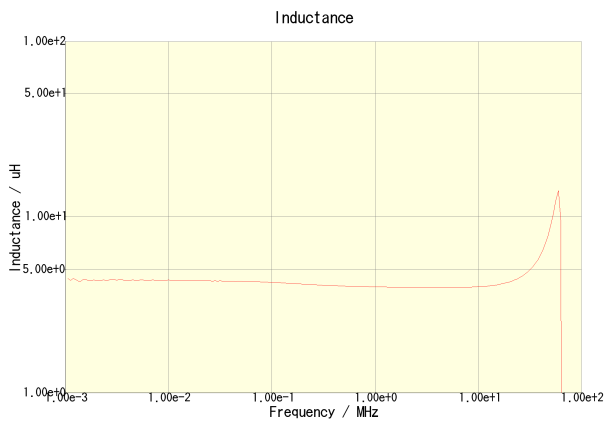

CLF10040T-4R7N

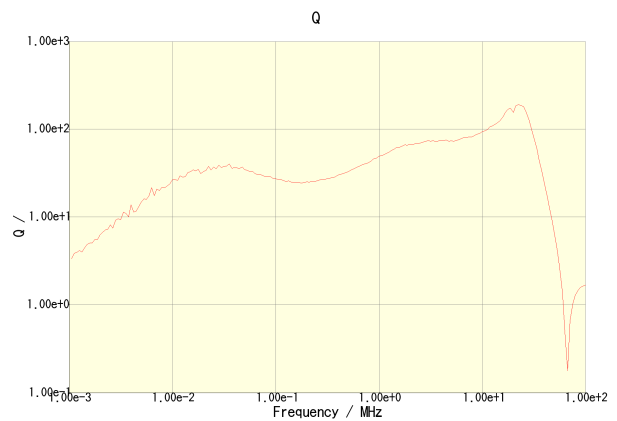


CLF10040T-4R7N


•This PDF document was created based on the data listed on the TDK Corporation website.  
 •All specifications are subject to change without notice.

# CLF10040T-4R7N

**Characteristic Graphs** (This is reference data, and does not guarantee the product's characteristics.)

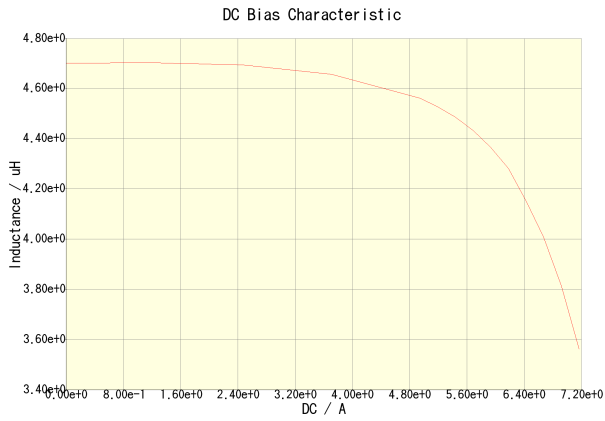


CLF10040T-4R7N(Amb. Temp. = 20degc)

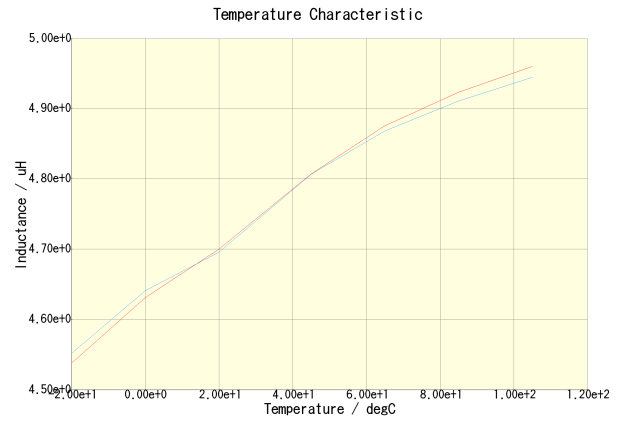

CLF10040T-4R7N(DC = 0A)

CLF10040T-4R7N(DC = 2.1A)

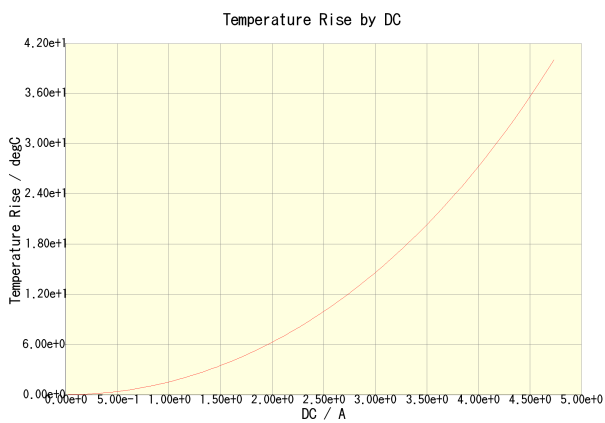

CLF10040T-4R7N(Amb. Temp. = 20degc)

•This PDF document was created based on the data listed on the TDK Corporation website.  
 •All specifications are subject to change without notice.