


## CORE SETS

## Effective core parameters

SYMBOL	PARAMETER	VALUE	UNIT
$\Sigma (1/A)$	core factor ( $C_1$ )	0.22	$\text{mm}^{-1}$
$V_e$	effective volume	102900.0	$\text{mm}^3$
$l_e$	effective length	150.0	mm
$A_e$	effective area	686.0	$\text{mm}^2$
$A_{\min}$	minimum area	676.0	$\text{mm}^2$
$W_t$	mass of core set	$\approx 519.0$	g

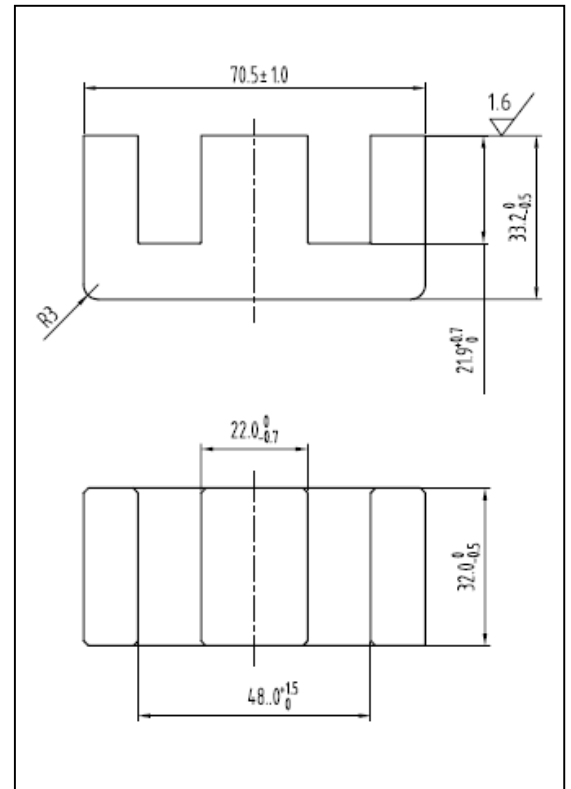

## Characteristic

GRADE	$AL$ (nH/N <sup>2</sup> )	$B$ (mT)	CORE LOSS (W)
	$f=10\text{kHz}$ $U=0.25\text{V}$	$H=250\text{A/m}$ $f=25\text{kHz}$ $T=100^\circ\text{C}$	$f=100\text{kHz}$ $B=200\text{mT}$ $T=100^\circ\text{C}$
DMR40	$10000 \pm 25\%$	$\geq 320$	$\leq 67.47$
DMR44	$10000 \pm 25\%$	$\geq 320$	$\leq 60.0$
DMR95	$13000 \pm 25\%$	$\geq 340$	$\leq 60.0$