
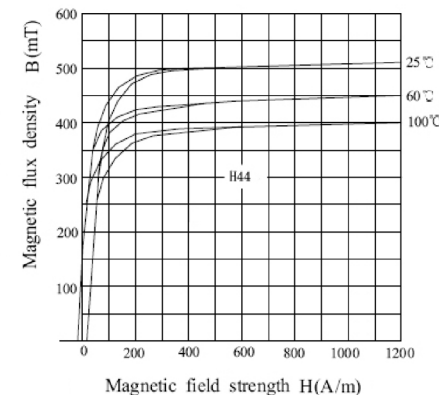
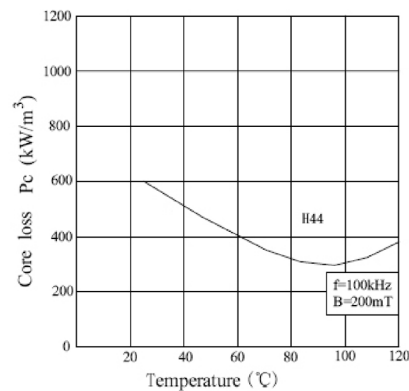
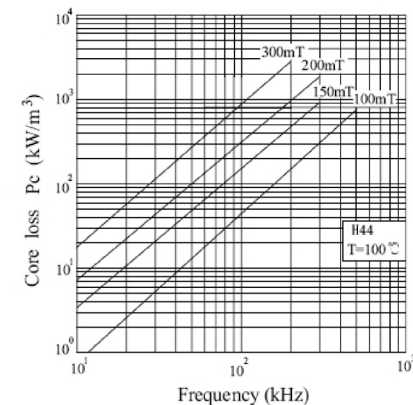


Initial permeability	μ_i		2400±25%	
Relative loss factor	$\tan\delta/\mu_i$	$\times 10^{-6}$		
Saturation flux density	Bs	mT	25°C	510
			100°C	400
			(1194A/m)	
Remanence	Br	mT	110	
Coercivity	Hc	A/m	13	
Power loss (f=16kHz, B=150mT)	Pc	kW/m ³	25°C	
			60°C	
			80°C	
			100°C	
Power loss (f=25kHz, B=200mT)	Pc	kW/m ³	25°C	
			60°C	
			80°C	
			100°C	
Power loss (f=100kHz, B=200mT)	Pc	kW/m ³	25°C	600
			60°C	400
			80°C	
			100°C	300
Power loss (f=500kHz, B=50mT)	Pc	kW/m ³	25°C	
			60°C	
			80°C	
			100°C	
Curie temperature	Tc	°C	> 230	
Resistivity	ρ	$\Omega \cdot m$	6.5	
Density	d	kg/m ³ × 10 ³	4.8	

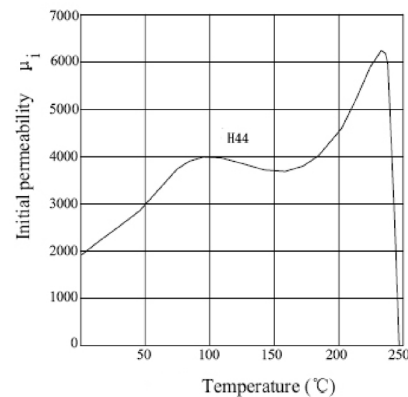

LEPCOS (NWL)
<http://ferrite.ru>

ХАРАКТЕРИСТИКИ МАТЕРИАЛА

H44