






CLF7045T-6R8N

Applications	 Commercial Grade
Feature	 Wire Wound
	 Magnetic Shield
	 Ferrite Core
Series	CLF Series / CLF7045 Type
Status	PROD



Size	
Length(L)	7.20mm +/-0.20mm
Width(W)	6.90mm +/-0.20mm
Thickness(T)	4.50mm +/-0.30mm
Recommended Land Pattern (A)	1.70mm Nom.
Recommended Land Pattern (B)	4.40mm Nom.
Recommended Land Pattern (C)	2.20mm Nom.

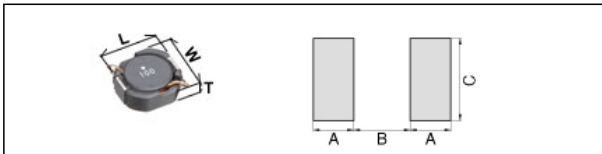
Electrical Characteristics	
Inductance	6.8uH +/-30% at 100kHz
Rated Current (L Change) [Typ.]	3.3A (10% Down)
Rated Current (Temperature Rise) [Typ.]	3A (30degC Rise)
DC Resistance [Nom.]	27mΩ
DC Resistance [Max.]	35.1mΩ

Other	
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105degC
Soldering Method	Reflow, Iron Soldering
AEC Q200	No
Packing	Blister (Plastic)Taping [330mm Reel]
Package Quantity	1000 Pcs Min.
Weight	0.8g


•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.

CLF7045T-6R8N


Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

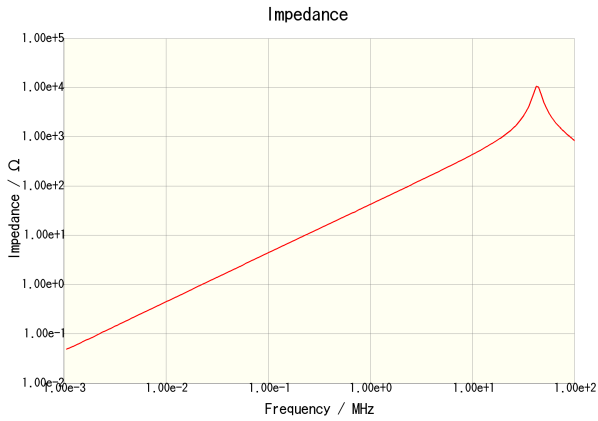


CLF7045T-6R8N

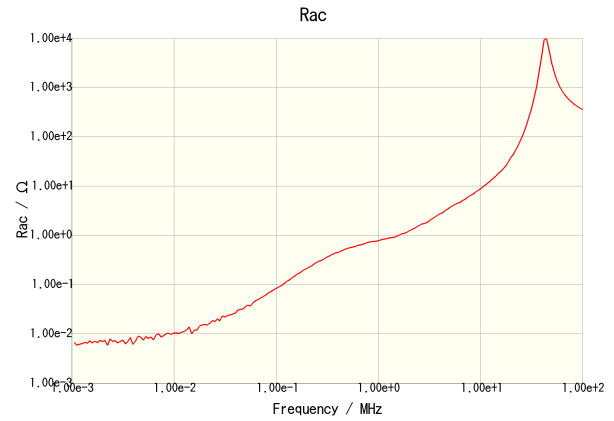

CLF7045T-6R8N

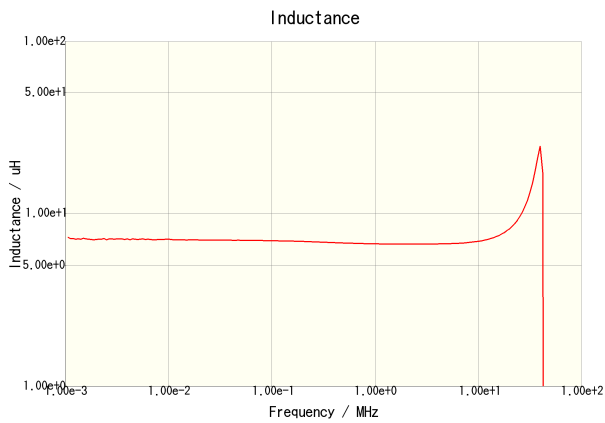

CLF7045T-6R8N

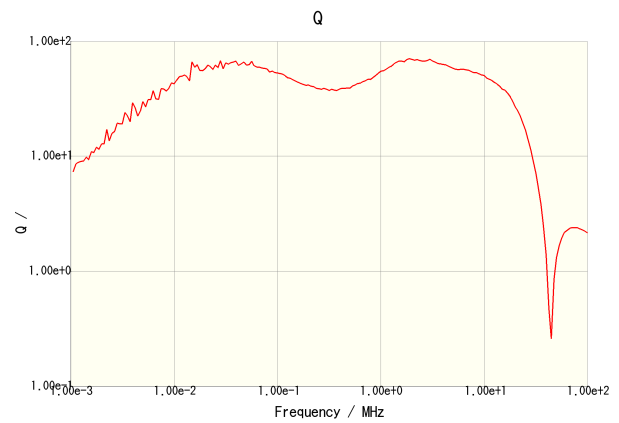


CLF7045T-6R8N

•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.

CLF7045T-6R8N

Characteristic Graphs (This is reference data, and does not guarantee the product's characteristics.)

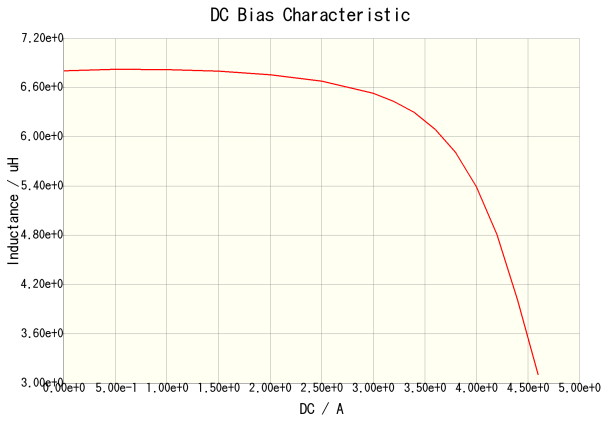


CLF7045T-6R8N(Amb. Temp. = 20degc)



CLF7045T-6R8N(DC = 0A)

CLF7045T-6R8N(DC = 1.5A)

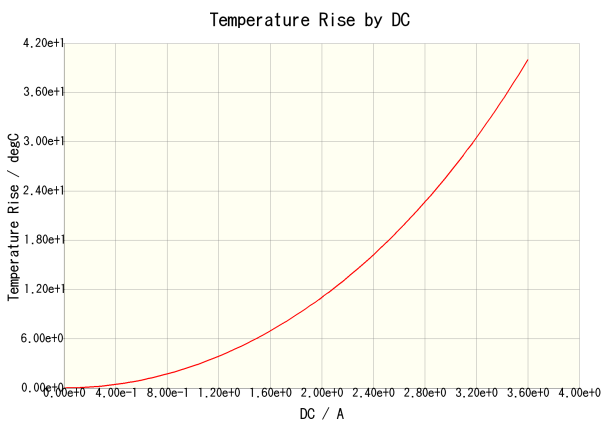

CLF7045T-6R8N(Amb. Temp. = 20degc)

•This PDF document was created based on the data listed on the TDK Corporation website.
 •All specifications are subject to change without notice.