

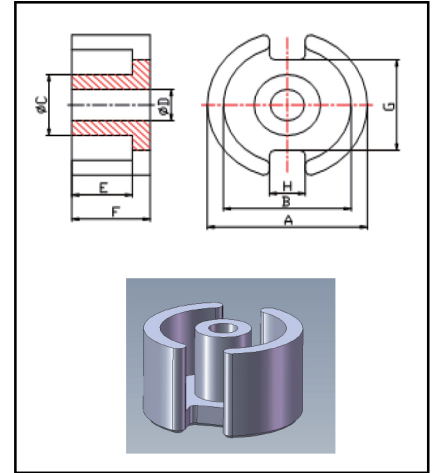


Type	Effective Parameters				Wt(g/set)
	C1(mm ⁻¹)	Le(mm)	Ae(mm ²)	Ve(mm ³)	
P14×8	0.90	20.60	23.1	475.86	3.50
P22×13	0.58	33.10	57.2	1893.32	13.00
P26×16	0.42	38.50	91.7	3530.45	22.00
P36×22	0.30	54.30	184.0	9991.20	60.00

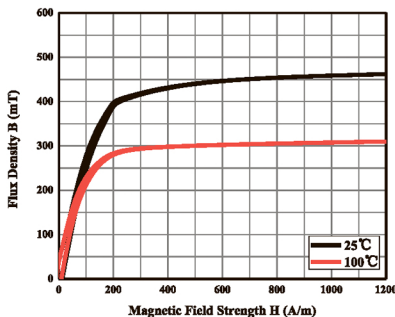

Type	Dimensions(mm)							
	A	B	C	D	E	F	G	H
P14×8	14.1 ⁺⁰ _{-0.4}	11.6 ^{+0.4} _{-0.15}	6.0 ⁺⁰ _{-0.2}	3.0 ^{+0.15} ₋₀	2.8 ^{+0.3} ₋₀	4.15 ⁺⁰ _{-0.15}	9.8 ⁺⁰ _{-0.5}	2.7 ^{+0.6} ₋₀
P22×13	21.6±0.38	17.9 ^{+0.7} ₋₀	9.4 ⁺⁰ _{-0.5}	4.55±0.1	4.6 ^{+0.25} ₋₀	6.7±0.1	14.3±0.4	4.0±0.4
P26×16	25.5±0.5	21.6±0.4	11.25±0.15	5.5±0.1	5.6±0.1	8.05±0.1	18.75±1.25	3.5REF
P36×22	35.6±0.6	30.4±0.5	15.9±0.3	5.45±0.15	7.5±0.1	10.9±0.1	/	/

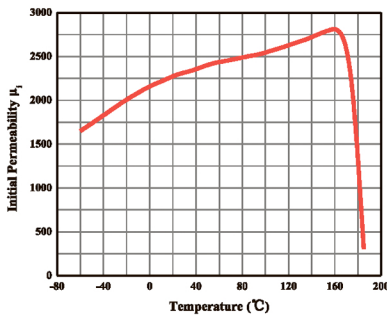

DMR70 Material Characteristics

CHARACTERISTICS	CONDITIONS		VALUE
Initial Permeability	10kHz, B<0.25mT	25°C	2300±25%
Saturation Magnetic Flux Density Bs(mT)		25°C	430
		100°C	310
Residual Magnetic Flux Density Br(mT)	50Hz, 1194A/m	25°C	60
		100°C	50
Coercive Force Hc (A/m)		25°C	15
		100°C	11
Relative loss factor tanδ/μi	10kHz, 0.25mT	25°C	<4
	100kHz, 0.25mT	25°C	<6
Relative Temperature Coefficient αμ (×10 ⁻⁶ /°C)	10kHz, B<0.25mT	5~25°C	0.3~1.3
		25~55°C	0.3~1.3
Hysteresis Material Constant ηB (×10 ⁻⁶ /mT)		25°C	<0.4
Curie Temperature Tc (°C)	10kHz, B<0.25mT		>170
Density d (g/cm ³)		25°C	4.8